

PORT OF HVIDE SANDE

Fact sheet – Quay 11

ISPS: UN Locator: DK210-0005

Address Vestergade 20, DK-6960 Hvide Sande



Quay:

Quay number 11

Quay length 150 meters

Depth 7,0 meters.

Turning basin, diameter 120 meters.

Quay area:

Area 2.200 m²

Carrying capacity: 0,75 t/m²

Single point load: 6 – 30 t/m²

LED work lighting 3500 k

The area is fenced, with access control and CCTV.

Quay details and restrictions

Berth	
Max LOA	100 meters
Max beam	30 meters
Max recommended draft	6.0 meters
Air draft restrictions	No restriction
Quay height above DVR90	2.1 meters
Fenders	Rubber fenders along quay
Bollards	Twin Horn 50/60 ton
Gangway	Ships must use own gangways
Jack Up	Possible, contact Port administration for information about seabed and geotechnical conditions.

Service


Fresh water	Standard connection
Electricity shore supply	1 tower á: 2 x 32 A standard connection

Navigation

Arrival / Departure restrictions	Contact Port control 1 hour before arrival, and 15 minutes before departure.
Tidal range	-0.6 to + 0.6 meter under normal conditions.

Other

Lowering lifeboats drills / work	Allowed, please notify Port control before commencing
Hot work	Allowed
Painting	Allowed
Distance to city center	0.5 km.

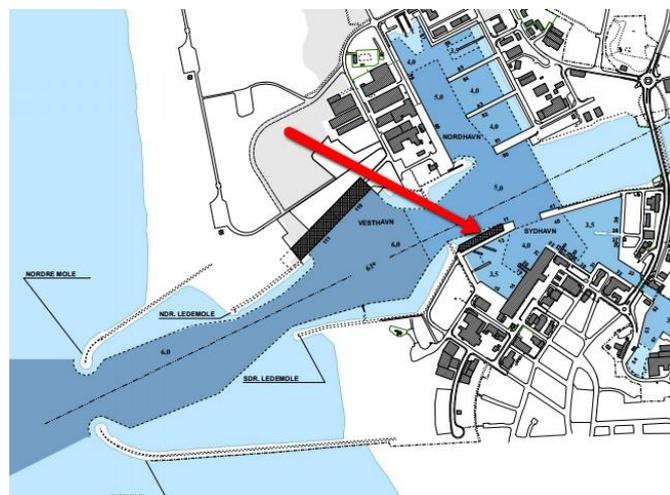

Service:

One contact to all service in Hvide Sande: Phone: +45 20 20 79 77 / email:
info@hssg.dk

Hvide Sande Service Group is a group formed by the Port of Hvide Sande and 34 companies all placed in the area near the City of Hvide Sande. Hvide Sande Service Group offers solutions to all needs ships and customers on the pier may have. We can assist with everything from lunch boxes to ship furniture, and our members provide quality work in accordance with HSSG's values: good service, flexibility and fair pricing.